

AquaSense® TAG _____

Z6915-XL

AquaSense Battery Powered Faucet



Flow Control Options

- □ -F 0.5 gpm/1.9 Lpm Vandal-Resistant Non-Aerated
- □ -J 1.5 gpm/ 5.7 Lpm Vandal-Resistant Laminar Flow
- □ -K 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- □ -L 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator
- □ -M 0.35 gpm/1.3 Lpm Vandal-Resistant Non-Aerated
- \square -N $\,$ 0.5 gpm/ 1.9 Lpm Vandal-Resistant Laminar Flow $\,$

Power Supply Choices (Sold Separately)

□-ACA 6 VDC Plug-In Power Converter □-HW6 Hardwired Power Converter

Optional Power Supply Accessories

□-CWB Connector Wire for Hardwire Install □-MJ Mini Junction Box

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter seperately.

The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

ZURN INDUSTRIES, LLC.

COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE

SANFORD NC 27330
Phone: 1-800-997-3876

Fax: 919-775-3541
www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED
3544 Nashua Drive

Mississauga, Ontario L4V1L2
Phone: 905-405-8272 Fax: 905-405-1292

Engineering Specification

ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

- Flow Rate
 - 1.5 gpm Vandal Resistant Aerator
- Occupant Detection Infrared convergence-type proximity sensor Thirty Second Time out feature
- Spout module Chrome Plated Cast Brass
- Also Includes
 - In-line filter 4 "AA" batteries
 - Inlet for a 1/2"[13] ball riser

Accessories


CareGuard Aerator
Drug Screening Applications
Mixing Tee
Temperature Mixing Valve
Supply Hoses for Mixing Valve
Single Stainless Supply Hose (-XL)
Thermostatic Mixing Valve for Multiple
Faucets
Thermostatic Mixing Valve for Single
Faucets
Other

Careguard currently only available with -E, 1.5 Vandal Resistant Laminar Aerator.

Zurn Lead Compliant products (-XL) are manufactured to comply with state laws and local codes that mandate lead content levels less than one quarter of one percent (0.25%) total lead content by weighted average.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

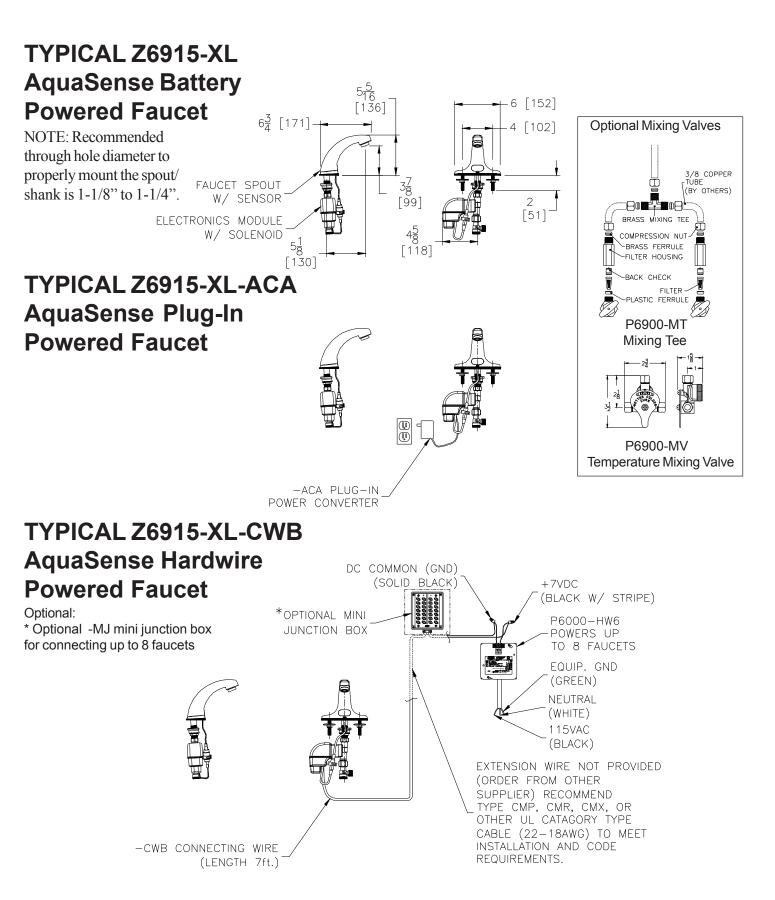

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-PC6 PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.