




## Concealed ZEMS6190AV Model Hardwired Automatic Sensor Flush Valve For 1-1/4" Urinals

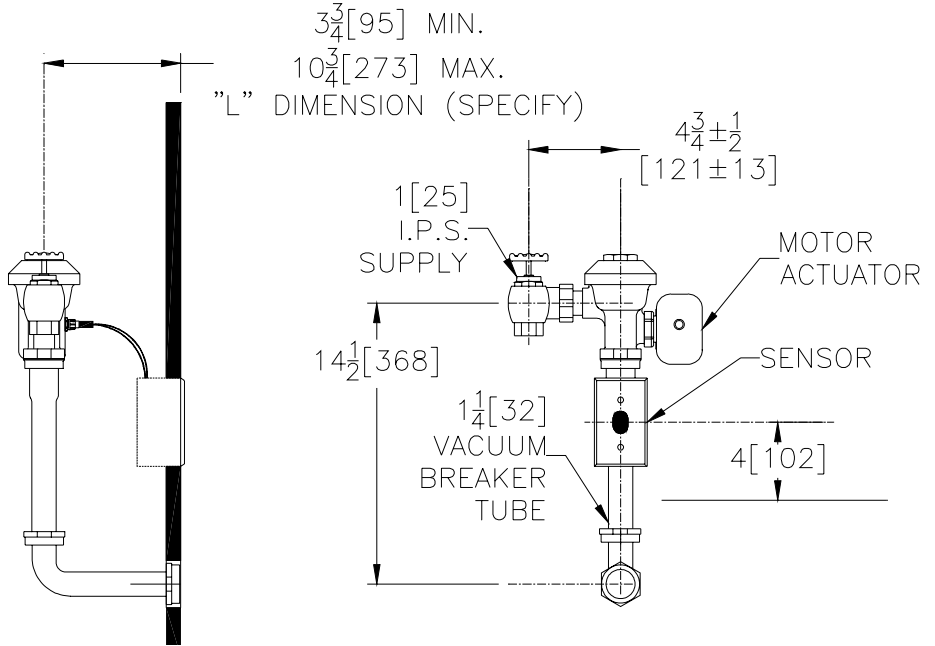

**Flow Options**

- WS1** 1.0 Gal. Low Consumption
- WS** 1.5 Gal. Water Saver
- Standard Flush** 3.0 Gallons Per Flush

**Suffix Options (Check/Specify Appropriate Options)**

- \_\_\_\_\_ **-BB** Battery Back-up
- \_\_\_\_\_ **-HW6** 120VAC/6VDC Hardwired Power Converter
- \_\_\_\_\_ **-MJ** Mini Junction Box
- \_\_\_\_\_ **-OB** Override Button
- \_\_\_\_\_ **-PC6** 120VAC/6VDC Plug-In Power Converter
- \_\_\_\_\_ Other

**ENGINEERING SPECIFICATION: ZURN ZEMS6190AV AquaSense® Concealed Hardwired Automatic Sensor Flush Valve For 1-1/4" [32] Urinals-**

Concealed, quiet diaphragm-type, rough brass, flushometer valve with Zurn's AquaVantage TPE, chloramine resistant, dual seal diaphragm with surface optimization and a clog resistant dynamic orifice. The valve incorporates a 6 VDC motorized actuator, an automatic sensor with a manual pushbutton over-ride, high back pressure vacuum breaker, hex coupling nut and adjustable tailpiece and spud coupling for back spud connection. Switchable sensor features include: courtesy flush, automatic 8 hour flush, and diagnostic indicator lights. Control stop has internal siphon-guard protection and sweat solder kit. Internal seals are made of chloramine resistant materials. Electrical box by others (see installation instructions for type and size). Note: Order power converter separate, one power converter operates up to eight valves.

This space is for Architectural/engineering Approval