




## Exposed Z6010AV-BWN Model with Bedpan Washer for Water Closets with Low Rough-In Water Supply

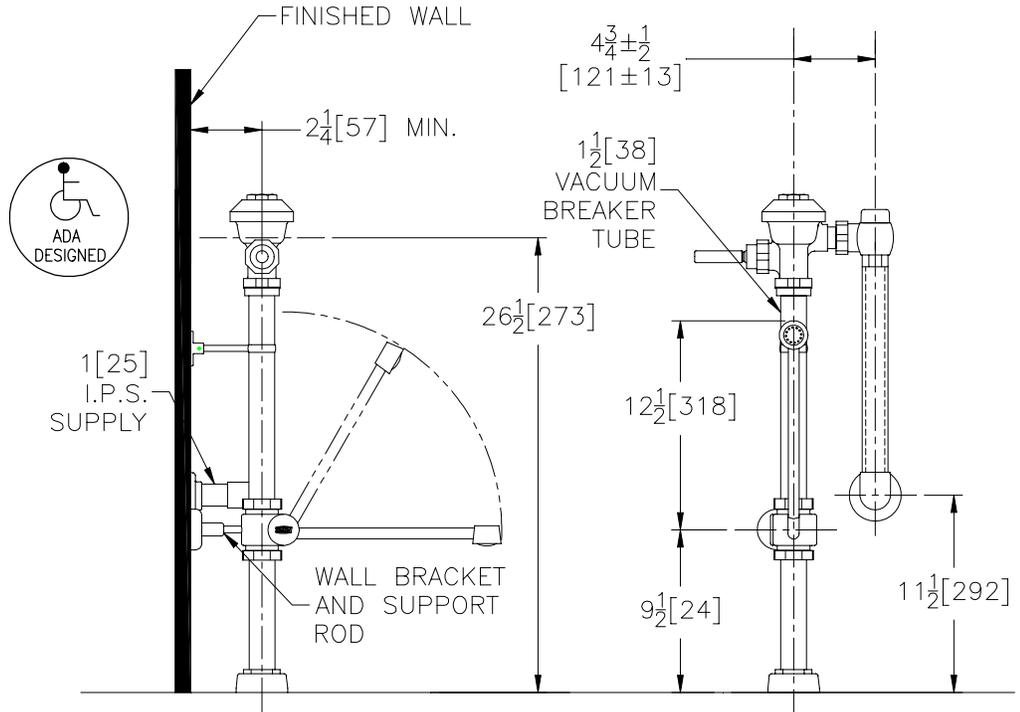

### Flow Options

- |   |                          |
|---|--------------------------|
| <input type="checkbox"/> -WS1           | 1.6 Gal. Low Consumption |
| <input type="checkbox"/> -FF            | 4.5 Gal. Full Flush      |
| <input type="checkbox"/> Standard Flush | 3.5 Gallons Per Flush    |

### Suffix Options (Check/Specify Appropriate Options)

- |           |                                |
|-----------|--------------------------------|
| _____ -BG | BioCare ADA Handle             |
| _____ -H  | Handle on Front of Flush Valve |
| _____ -L  | 1" [25] Metal Push Button      |
| _____ -L3 | 3" [76] Metal Push Button      |
| _____ -YJ | Split Ring Pipe Support        |
| _____ -YK | Solid Ring Pipe Support        |
| _____     | Other                          |

**ENGINEERING SPECIFICATION:** ZURN Z6010AV-BWN AquaVantage® 'AV' Exposed Closet Flush Valve with Bedpan Washer- Exposed, quiet diaphragm-type, chrome plated, flushometer valve with a polished exterior. Complete with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered by-pass. The valve is ADA compliant with a non-hold open and no leak handle feature, high back pressure vacuum breaker, bedpan washer assembly, wall bracket and support rod, 1"x1"[25x25] supply elbow, supply cover tube, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit, and a cast wall flange with set screw. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval