


### AquaSense® Model

**TAG** 

## **Exposed ZEMS6000PL-IS Model**

# Hardwired Automatic Sensor Flush Valve For Water Closets

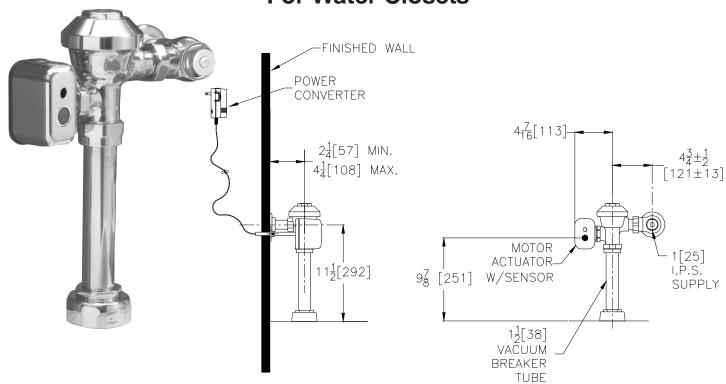

Flow	Option	S
------	--------	---

-WS1 1.6 Gal. Low Consumption

☐ -FF 4.5 Gal. Full Flush
☐ Standard Flush 3.5 Gallons Per Flush

### Suffix Options (Check/Specify Appropriate Options)

\_\_\_\_\_ -YJ Split Ring Pipe Support
-YK Solid Ring Pipe Support
Bumper on Angle Stop

\_\_\_\_ Other

#### Accessories (Order seperate as specified)

**P6000-PC6** 6VDC Plug-in Power Converter

(Up to 8 valves)

**P6000-MJ** Mini Junction Box

P6000-HW6 Hardwire Power Converter

(Up to 8 valves)

**ENGINEERING SPECIFICATION: ZURN ZEMS6000PL-IS AquaFlush Exposed Hardwired Automatic Sensor Flush Valve** For Water Closets- Exposed, quiet diaphragm-type, chrome plated, flushometer valve with a polished exterior. Complete with a chloramine resistant, dual seal diaphragm with a clog resistant by-pass. The valve incorporates a 6 VDC motorized actuator, an integral infrared convergence-type proximity sensor and a manual push-button override into an all-metal, polished chrome plated housing. Sensor range automatically adjusts to its environment at power up and is powered by a 6 VDC power converter. Each power converter can accomodate up to eight flush valves. The valve is complete with high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection. The AguaFlush® Plus is also furnished with a sweat solder kit, vandal resistant stop cap, and cast wall flange with set screw. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval

Date: 10/27/08

Product No. ZEMS6000PL-IS

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292