




TAG

## **Exposed Z6203 Model**

## **Metroflush Piston Operated Flush Valve** For 3/4" Urinal Valves

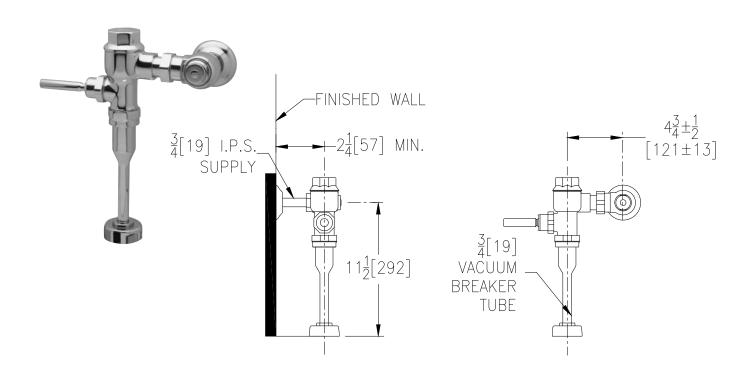

E	EWS		0.5 Gallons Per Flush
	NS1		1.0 Gal. Low Consumption Flush
□ -F	F		3.0 Gal. Full Flush
	Standard	Flush	1.5 Gallons Per Flush
Suffix Options (Check/Specify Appropriate Options)			
	-L	1"[25]	Metal Push Button
	-L3	3"[76]	Metal Push Button
	-VC	Vanda	l Resistant Stop Cover
	-XYV	Less V	acuum Breaker .

Sweat Solder Kit

Cast Wall Flange

Split Ring Pipe Support Solid Ring Pipe Support

Flow Options

-YB

-YC

**ENGINEERING SPECIFICATION: ZURN Z6203 Metroflush Pis**ton Operated Exposed Urinal Flush Valve- The Metroflush is an exposed, quiet piston type, chrome plated flushometer valve with polished exterior. Complete with Zurn MetroVantage chloramine resistant piston with a clog resistant filtered by-pass. The valve is ADA compliant with a non-hold open and no-leak handle feature, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval

Date: 1/31/07

Product No. Z6203

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330 Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

Other