

**Suffix** 

-14

-16

## AQUA-PANEL SHOWER UNIT


Z7500



Description

## **ENGINEERING SPECIFICATIONS: ZURN Z7500**

Prefabricated stainless steel shower unit, consisting of the TEMP-GARD pressure balancing shower valve with single bronze stem, stainless steel balancing piston & bottom access integral service stops. Standard with 1/2" copper tubing assembly enclosed by 18 gage stainless steel #4 brushed finish shroud, -i6 chrome plated brass shower head with 2.5 GPM flow control and adjustable spray pattern on institutional bracket, metal stem handle, side mount soap dish & all vandal proof securing screws.

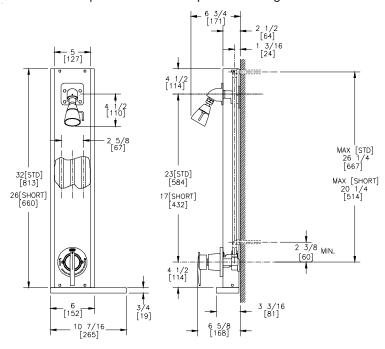

Note: All dimensions are for reference only. Do not use for pre-plumbing **OPTIONS** (Check/specify appropriate options)

## **STANDARDS**

## Fixed Spray Institutional Shower Head (2.5 GPM) -i2 (Other Institutional Shower Heads Available) Large Brass Shower Head with Adjustable Spray Pattern (2.5 GPM) -1.25 1.25 GPM Shower Head Flow Control 1.5 GPM Shower Head Flow Control -1.75 1.75 GPM Shower Head Flow Control 2.0 GPM Shower Head Flow Control -2.0 Less Soap Dish -LS Short Length Shroud 26" (660mm) -SL -TC Matching Shroud Extension to Cover Thru Ceiling Piping (Specify extension height) Matching Shroud Cover For Concealed Horizontal Piping

(Application drawings available for custom installations)

Tested to meet the following standards for valves and plumbing fittings:
Shower heads meet ANSI A112.18.1
Meets or Exceeds ANSI A117.1M standard for physically handicapped



Date: 8/5/10

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733
Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

14 Gage Stainless Steel Shroud

16 Gage Stainless Steel Shroud