


ECOLOTROL CERAMIC DISC WALL HYDRANT Encased, Anti-Siphon, Automatic Draining, Moderate Climate TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

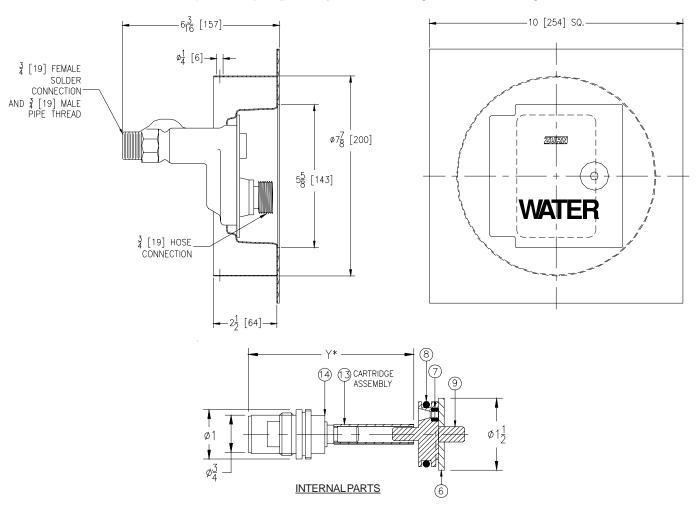

Wall	Approx.	
Thickness	Wt. Lbs.	
In Inches	[kg]	
8 [203]	4 [2]	

ENGINEERING SPECIFICATION: ZURN Z1332-EZ Encased Ecolotrol "anti-siphon" moderate climate/interior wall hydrant. For flush installation in 8 [203] dia. cored hole concrete wall. Complete with integral backflow preventer, all bronze interior parts with 1/2 turn ceramic disk cartridge and combination 3/4 [19] female solder and 3/4 [19] male pipe thread inlet. Stainless steel large flange box and hinged cover with operating key lock and "WATER" stamped on cover.

OPTIONS ((Check/specify	appropriate	options)

SUFFIXES					
CL	Cylinder Lock				
RK	Hydrant Parts Repair Kit				
RT1	2 Ceramic Cartridge Removal Tool (Up to 12 [305] Wall)				
34E	EL 3/4 [19] 90° Solder Inlet Elbow				
34F	FIP 3/4 [19] IP Straight Female Inlet Adapter				

<u>I AKTO LIOT</u>					
<u>ltem</u>	<u>Name</u>	<u>Quan.</u>			
<u>14</u>	<u>Cartridge</u>	<u>1</u>			
<u>13</u>	Operating Tube	<u>1</u>			
<u>9</u>	Operating Coupling	<u>1</u>			
<u>8</u>	O-Ring	<u>1</u>			
<u>7</u>	O-Ring	<u>2</u>			
<u>6</u>	Retaining Washer	<u>1</u>			

PATENTED

PAT. NO. 7,395,834

REV. B DATE: 7/2/08

C.N. NO. 98717

*WHEN ORDERING REPLACEMENT CARTRIDGE ASSEMBLY PARTS SPECIFY'Y' DIM.

DWG. NO. 67500 PRODUCTNO. Z1332-EZ