




Z1333

SPECIFICATION SHEET

ECOLOtrol CERAMIC DISC WALL HYDRANT
Exposed, Anti-Siphon, Automatic Draining, Moderate Climate TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

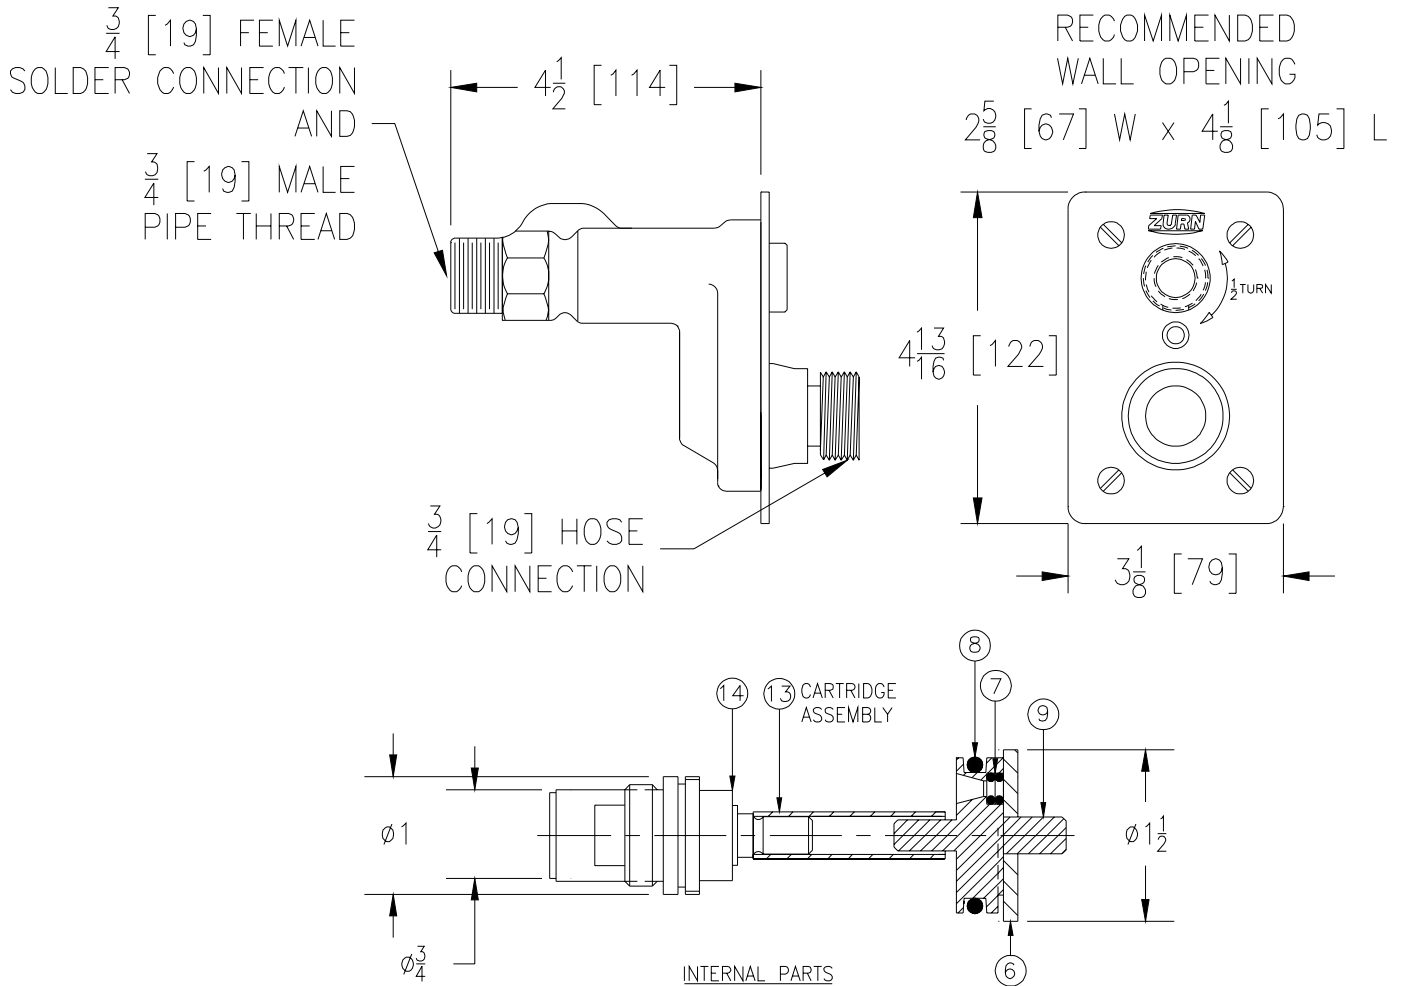

Wall Thickness In Inches	Approx. Wt. Lbs. [kg]
6 [152]	3 [1]

ENGINEERING SPECIFICATION: ZURN Z1333 Exposed Ecolotrol "anti-siphon" wall hydrant, for moderate climate and interior wall installation. Complete with integral backflow preventer, all bronze interior parts, with 1/2 turn ceramic disk cartridge and combination 3/4[19] female solder and 3/4[19] male pipe thread inlet. Stainless steel face with operating key.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ____ -PB Polished Bronze Face
- ____ -RK Hydrant Parts Repair Kit
- ____ -RT12 Ceramic Cartridge Removal Tool (Up to 12 [305] Wall)
- ____ -34EL 3/4 [19] 90° Solder Inlet Elbow
- ____ -34FIP 3/4 [19] IP Straight Female Inlet Adapter

PARTS LIST

Item	Name	Quan.
14	Cartridge	1
13	Operating Tube	1
9	Operating Coupling	1
8	O-Ring	1
7	O-Ring	2
6	Retaining Washer	1

REV. E	DATE: 8/26/03	C.N. NO. 91212
DWG. NO. 58875	PRODUCT NO. Z1333	