

LABORATORY FAUCET - SINGLE


Z825V1

TAC		
TAC	J	



Engineering Specifications: Zurn AquaSpec® Z825V1

Polished chrome-plated single laboratory faucet with integral shank, a quarter turn ceramic disc cartridge and a 8" [203mm] centerline rigid gooseneck spout with vacuum breaker. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), a 2-1/2" [64mm] vandal-resistant color-coded metal lever handle, mounting hardware and a 1/2" NPSM coupling nut for standard lavatory riser.

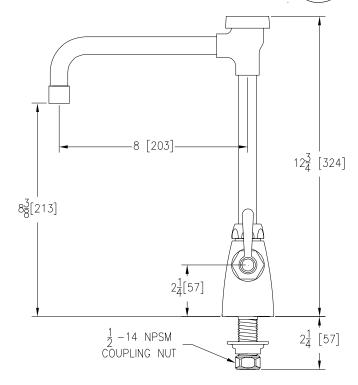

Note: All dimensions are for reference only. Do not use for pre-plumbing.

 $2\frac{5}{8}$ [67]

OPTIONAL ACCESSORIES

 $\frac{1}{16}[2]$ TO $1\frac{1}{2}[38]$

 $\emptyset 2\frac{3}{16}$ [56]

Suffix	Description
AR	Anti-Rotation Pins
G	1-1/4" [32mm] Grid Strainer Drain
HCT	Hot/Cold Text Indexes
LP	Low Profile
PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
-6M	Male Serrated Nozzle Outlet
-7M	1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet
-16M	1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male Spray Outlet
 -17M	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Male Aerator
18M	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Male Laminar Flow

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733
Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292