


Engineering Specifications: Zurn AquaSpec® Z843K6

Polished chrome-plated cast brass 8" [203mm] sink faucet with quarter turn ceramic disc cartridges, 3/8" [10mm] short swivel inlets providing adjustable centers from 7-1/4" [184mm] to 8-3/4" [222mm], a 13" [330mm] double-jointed brass swing spout. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 6" [152mm] vandal-resistant color-coded metal wrist blade handles.

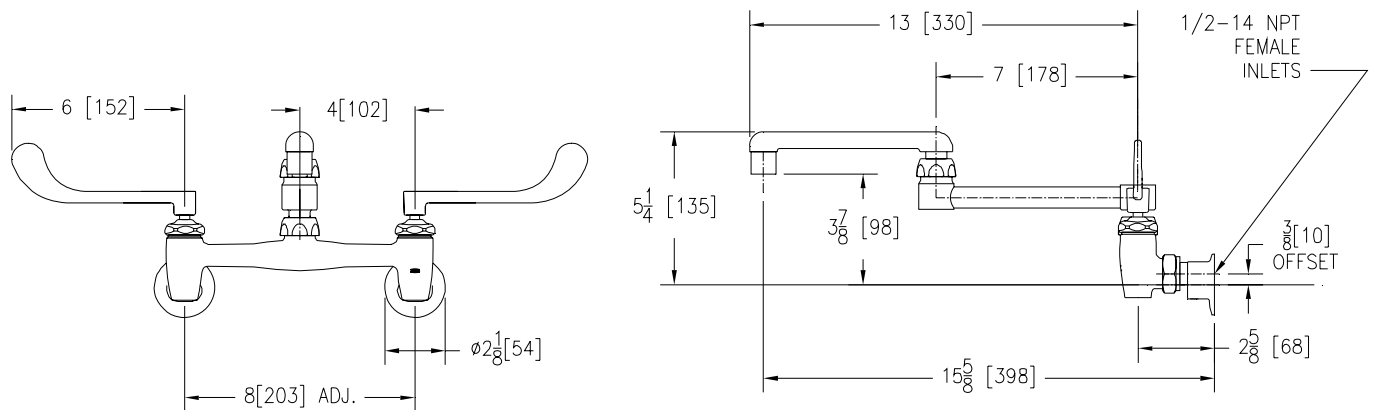

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

| Suffix | Description |
|-----------|--|
| ___ -CS | Check Stops |
| ___ -DJ18 | 18" [457mm] Double Jointed Spout |
| ___ -HCT | Hot/Cold Text Indexes |
| ___ -LSI | 2-1/2" [64mm] Long Swivel Inlets with Integral Stops |
| ___ -RC | Rough Chrome Plated |
| ___ -2F | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator |
| ___ -3F | 0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Aerator |
| ___ -4F | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow |
| ___ -5F | 2.0 GPM [7.6 L] Female Spray Outlet |
| ___ -6P | Master Carton (Qty. 6) |
| ___ -7F | 1.0 GPM [3.8 L] Pressure Compensating Female Spray Outlet |
| ___ -11F | Female Threaded Single Screen Outlet |
| ___ -16F | 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Female Spray Outlet |
| ___ -17F | 1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Aerator |
| ___ -18F | 1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Laminar Flow |

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292