


AquaSense Sensor Faucet

Suffix Options (Check/Specify Appropriate Options)

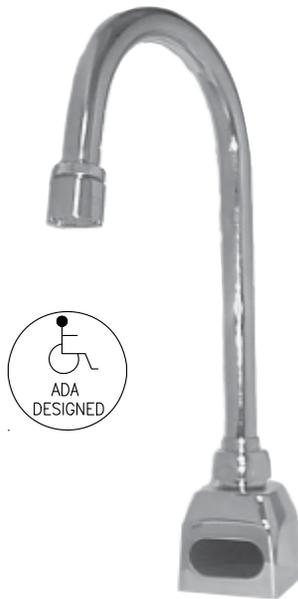

- _____ -ADM Above Deck Mixer
- _____ -ADM-1 Above Deck Mixer w/4" Cover Plate
- _____ -ADM-2 Above Deck Mixer w/8" Cover Plate
- _____ -CP4 Cover Plate 4[102] Centers
- _____ -CP8 Cover Plate 8[203] Centers
- _____ -F 0.5 GPM Vandal Resistant Aerator
- _____ -FC Flow Control in Base of Spout
- _____ -GA 3-1/2" Gooseneck Spout
- _____ -GC 8" Gooseneck Spout
- _____ -H4 Wrist Blade Handle for ADM
- _____ -IA3 Inlet Adaptor (3/8"[10] compression)
- _____ -J 1.5 GPM Laminar Flow
- _____ -K 1.0 GPM Laminar Flow
- _____ -L 1.0 GPM Vandal-Resistant Aerator
- _____ -MJ Mini Junction Box
- _____ -MT Mixing Tee
- _____ -MV Temperature Mixing Valve
- _____ -SH Supply Hoses for Mixing Valve
- _____ -SO Rosette Spray Aerator
- _____ -TMV Thermostatic Mixing Valve for Multiple Faucets
- _____ -TMV-1 Thermostatic Mixing Valve for Single Faucets
- _____ Other

Z6920 AquaSense Battery Powered Faucet

ENGINEERING SPECIFICATION: The Z6920 sensor faucet is a battery powered sensor faucet for retrofit and new construction. The faucet incorporates an infrared convergence type proximity sensor into the cast brass chrome plated base of the gooseneck faucet. The faucet is furnished complete with sensor module, spout module and in-line filter, 4 "AA" batteries, a 1.5 GPM vandal resistant aerator, an inlet for a 1/2"[13] ball riser and single supply hose. Sensor range is factory set for optimum performance.

Z6920-ACA AquaSense Plug-In Powered Faucet

ENGINEERING SPECIFICATION: The Z6920-ACA sensor faucet is a plug-in powered electronic sensor faucet for retrofit and new construction. The faucet incorporates an infrared convergence type proximity sensor into the cast brass chrome plated base of the gooseneck faucet. The faucet is furnished complete with sensor module, spout module, in-line filter, a 1.5 GPM vandal resistant aerator, 6 VDC plug-in power converter, an inlet for a 1/2"[13] ball riser and single supply hose. Also included are 4 'AA' batteries that provide battery backup power to the faucet during power outages. Sensor range is factory set for optimum performance.

Z6920-CWB AquaSense Hardwire Powered Faucet

ENGINEERING SPECIFICATION: The Z6920-CWB sensor faucet is a hardwired electronic sensor faucet for retrofit and new construction. The faucet incorporates an infrared convergence type proximity sensor into the cast brass chrome plated base of the gooseneck faucet. The faucet is furnished complete with sensor module, spout module, in-line filter, a 1.5 GPM vandal resistant aerator, connecting wire to power converter, an inlet for a 1/2"[13] ball riser and single supply hose. Also included are 4 'AA' batteries that provide battery backup power to the faucet during power outages. Sensor range is factory set for optimum performance.


NOTE: For Hardwire applications furnish P6000-HW6 power converter. The P6000-HW6 will power up to 8 sensor faucets. Order P6000-HW6 power converter seperately.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330



Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292

TYPICAL Z6920 AquaSense Battery Powered Faucet

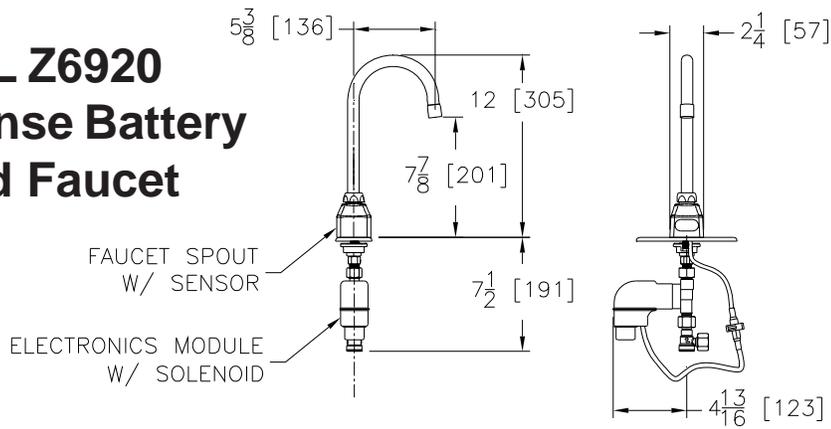


TYPICAL Z6920-ACA AquaSense Plug-In Powered Faucet

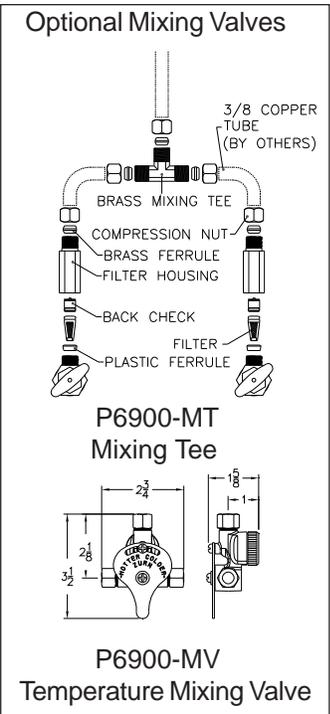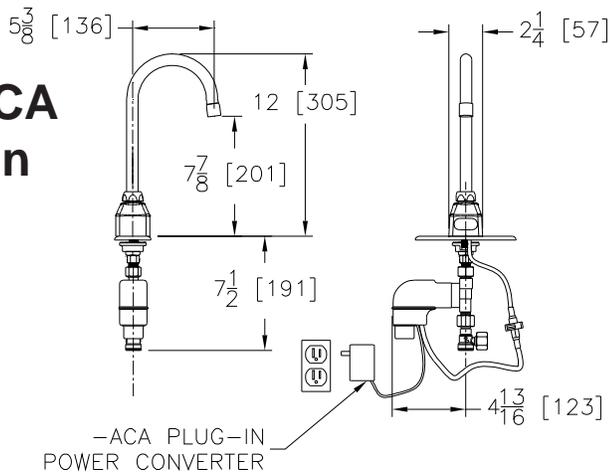

TYPICAL Z6920-CWB AquaSense Hardwire Powered Faucet

Optional:
* Optional -MJ mini junction box for connecting up to 8 faucets

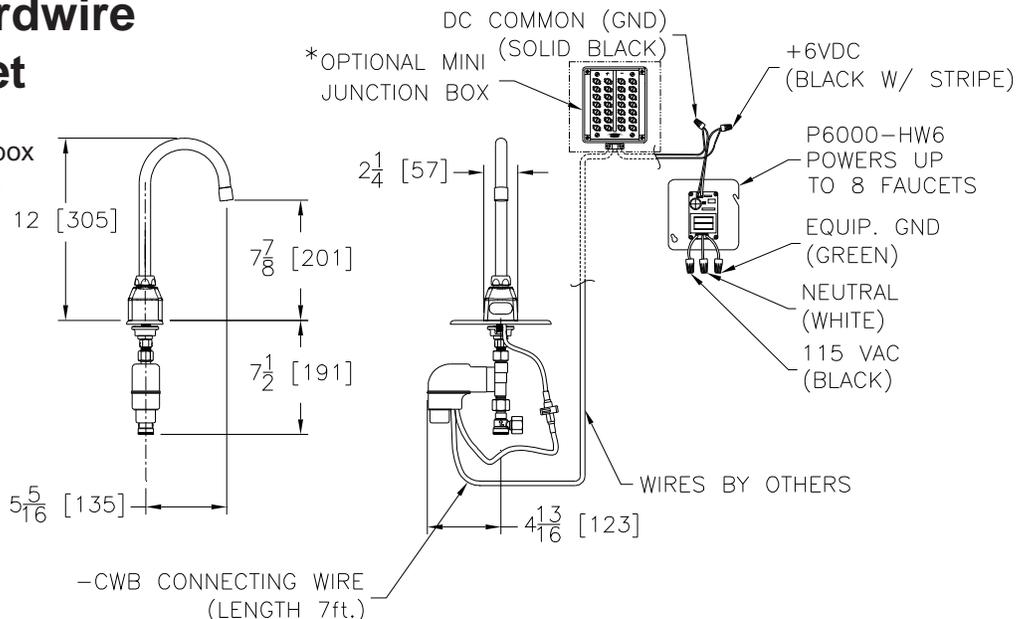

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6900-ACA PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292




AquaSense®

TAG _____

Z6920-ADM-2-H4 (Example)

AquaSense "A" Lavatory Faucet with Above Deck Mixer, 4" Wrist Blade Handle & 8" Cover Plate

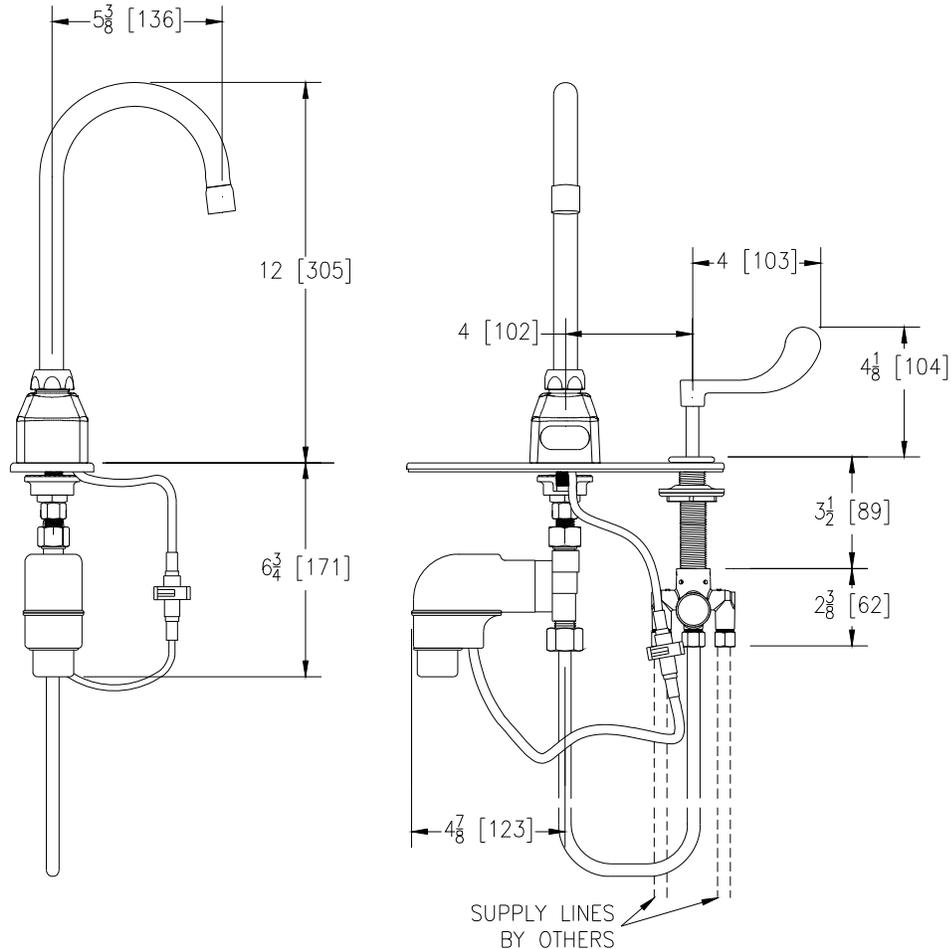

This space is for Architectural/engineering Approval

ENGINEERING SPECIFICATION: ZURN Z6920-ADM-2-H4 AquaSense "A" Lavatory Faucet with Above Deck Mixer, 4" Wrist Blade Handle and 8" [203] Centerset Cover Plate-

The AquaSense faucet is a sensor faucet for retrofit and new construction. The faucet incorporates an infrared convergence type proximity sensor into the base of the gooseneck faucet. The faucet is furnished with sensor module, spout module and an above deck mixing valve with integral filter and 3/8" compression fittings for easy installation. Complete with a 2.0 gpm vandal-resistant aerator, chrome plated brass 8" [203] centerset cover plate with a through hole to attach the ADM and mounting hardware. Inlet for a 1/2" ball riser supply hose (furnished by others) is standard. Other inlet configurations are optional.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com


In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292



AquaSense®

TAG _____

Z6920-CP4-MT (Example) AquaSense Battery Lavatory Faucet with 4" Cover Plate

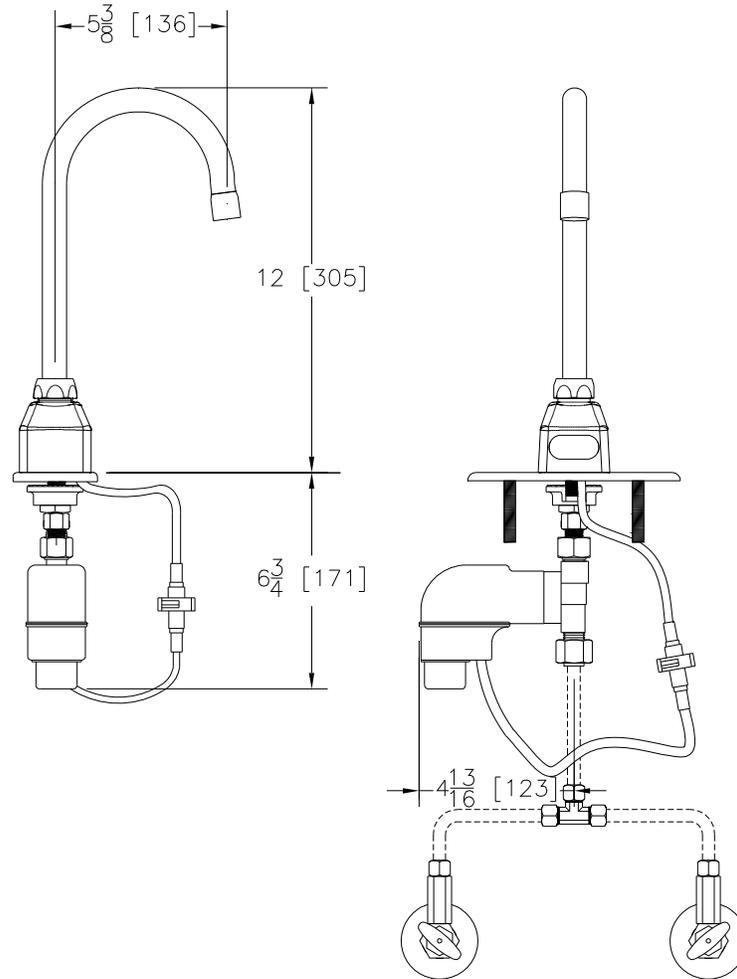

This space is for Architectural/engineering Approval

ENGINEERING SPECIFICATION: ZURN Z6920-CP4-MT AquaSense Lavatory Faucet with 4" Centerset Cover Plate- The AquaSense faucet is a sensor faucet for retrofit and new construction. The faucet incorporates an infrared convergence type proximity sensor into the base of the gooseneck faucet. The faucet is furnished with sensor module, spout module and an above deck mixing valve with integral filter and 3/8" compression fittings for easy installation. Complete with a 2.0 gpm vandal-resistant aerator, 4" centerset cover plate with mounting hardware, hot and cold inlet adapters with back check valves and inlet filters, and mixing tee. Inlet for a 1/2" ball riser or supply hose (furnished by others) is standard.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com


In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292



AquaSense®

TAG _____

Z6920-ADM (Example) AquaSense Battery Powered Lavatory Faucet with Above Deck Mixer

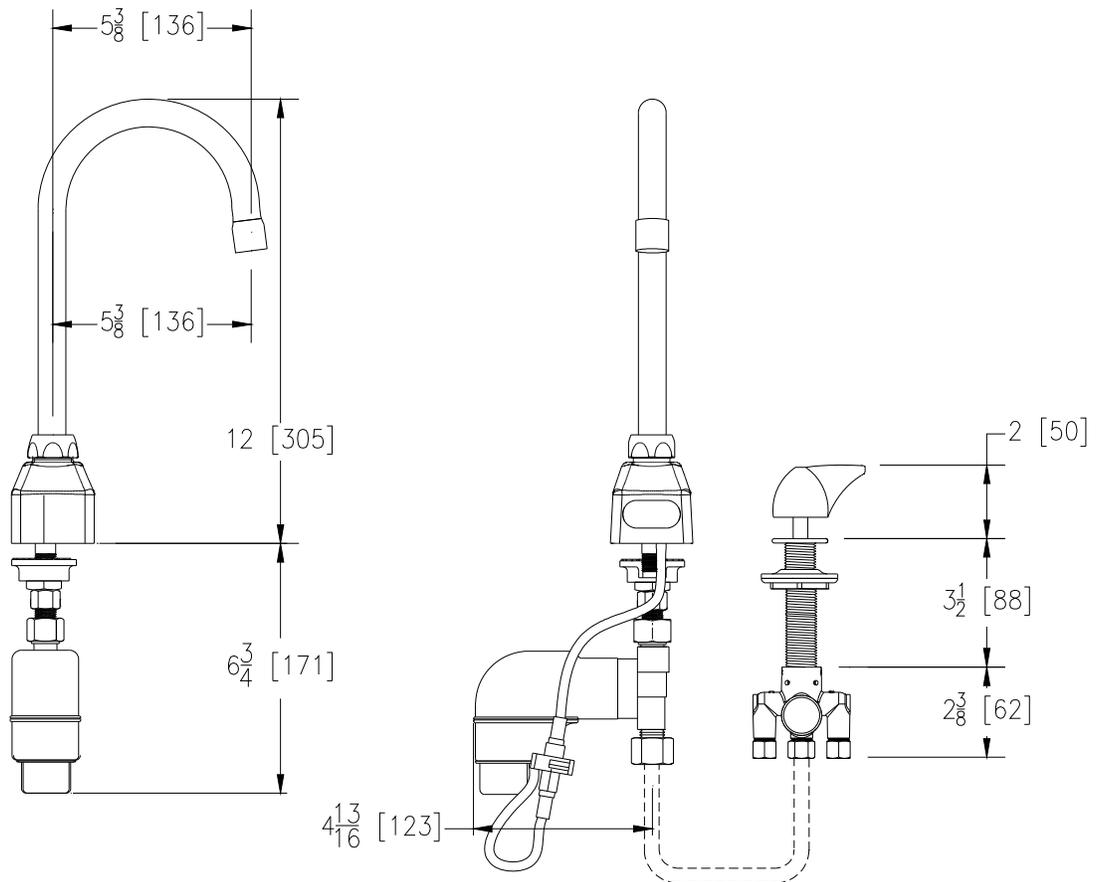

This space is for Architectural/engineering Approval

ENGINEERING SPECIFICATION: ZURN Z6920-ADM AquaSense Battery Powered Lavatory Faucet with Above Deck Mixer- The AquaSense sensor faucet is a battery powered sensor faucet for retrofit and new construction. The faucet incorporates an infrared convergence-type proximity sensor into the chrome plated cast brass spout. The faucet is furnished complete with sensor module, spout module, and an above deck mixer with intergal filter and 3/8" [10] compression fittings. Standard equipment consists of 4 'AA' batteries, a 1.5 GPM vandal resistant aerator and an inlet for a 1/2" [13] ball riser supply hose (furnished by others). Sensor range is factory set.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292