AQUASPEC® FAUCETS

MODEL - Z-81100 SERIES 4" [102] CENTERSET



TECHNICAL INFORMATION

FLOW: 2.0 GPM [7.6 L] PRESSURE COMPENSATING AERATOR

MAXIMUM PRESSURE: 125 PSI
MAXIMUM TEMPERATURE: 180° F
HANDLE NUT TORQUE: 15-20 FT-LBS

CARTRIDGE STYLE: QUARTER TURN CERAMIC DISK

*OTHER AERATORS AVAILABLE BY REQUEST

INSTALLATION INSTRUCTIONS

- 1. REMOVE FAUCET BODY FROM CARTON AND APPLY PLUMBERS PUTTY TO UNDERSIDE OF BODY.
- 2. PLACE FAUCET ON SINK AND REMOVE PLASTIC MOUNTING NUTS (ITEM #5A) FROM BAG G60502.
- 3. HAND TIGHTEN PLASTIC MOUNTING NUTS FROM UNDER SINK. MAKE SURE FAUCET IS CENTERED PROPERLY. **DO NOT OVER TIGHTEN.**
- 4. ATTACH LAVATORY SUPPLIES TO FAUCET WITH RISER NUTS (ITEM #5B).
- 5. OPTIONAL: POP-UP (-P)

 GRID STRAINER (-G)

 ADA OFFSET GRID DRAIN (-GH)

INSTALL POP-UP OR GRID STRAINER IN SINK OUTLET AND PLUMB WASTE CONNECTION.


- 6. TURN SUPPLY WATER ON AND OPERATE FAUCET CHECKING FOR LEAKS.
- 7. IT MAY BE NECESSARY TO SHUT WATER OFF AND REMOVE CARTRIDGES TO CLEAN SUPPLY LINES. CARTRIDGES CAN BE REMOVED BY FIRST REMOVING THE HANDLES. COLOR INDEXES CAN BE REMOVED BY INSERTING A PIN INTO THE HOLE ON THE UNDERSIDE OF THE HANDLE. AFTER THE HANDLES HAVE BEEN REMOVED, UNSCREW THE HANDLE NUTS AND PULL UP ON THE CARTRIDGE. ZURN WILL SUPPLY HANDLE PORT PLUGS (ZURN PART #61094001) AT YOUR REQUEST.
- 8. REPLACE CARTRIDGES IN BODY AND HAND TIGHTEN HANDLE NUTS. PLACE HANDLES ON THE CARTRIDGE STEM AND LOCATE THEM AS DESIRED. TIGHTEN HANDLE NUT TO 15-20 FT-LBS OF TORQUE.
- 9. REPLACE HANDLE SCREWS AND COLOR INDEX BUTTONS.
- 10. INSTALL AERATOR INTO FAUCET AND HAND TIGHTEN. IT MAY BE NECESSARY TO UNSCREW AND CLEAN AERATOR AT START-UP.

MAINTENANCE

- 1. YOUR ZURN AQUASPEC FAUCET HAS A HIGHLY POLISHED NICKEL CHROME PLATED FINISH. CLEAN WITH SOAP AND WATER OR A MILD CLEANER WHICH IS SAFE FOR CHROME PLATING. DO NOT USE ACIDS OR TOILET BOWL CLEANER AS THEY WILL DAMAGE THE FINISH.
- 2. AQUASPEC FAUCETS CONTAIN CERAMIC DISK CARTRIDGES WHICH REQUIRE NO MAINTENANCE. TO REMOVE THE CARTRIDGE, SHUT THE WATER OFF, LOOSEN THE HANDLE NUTS AND PULL UP ON THE CARTRIDGE.

REPLACEMENT PARTS

COLD WATER CARTRIDGE	59517001	
HOT WATER CARTRIDGE	59517002	
INDEX BUTTONS	G60500	

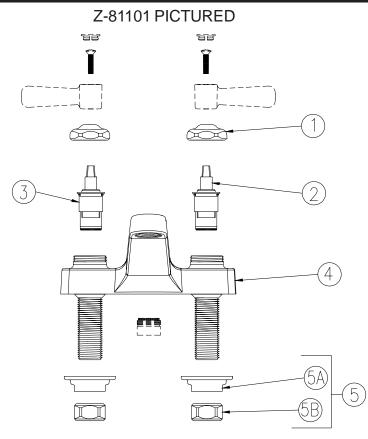

Z-81100 PARTS LIST

ПЕМ	QTY	ПЕМ			QTY
2 59517001 SHC	DLE NUT 2 RT COLD CARTRIDGE 1 RT HOT CARTRIDGE 1 Y 1	5 5A 5B	G60502 59530002 59532001	NUTS MOUNTING NUT 1/2" [13] NPSM RISER NUT	1 2 2

ZURN INDUSTRIES, INC.

COMMERCIAL BRASS OPERATIONS 2640 SOUTH WORK STREET FALCONER, N.Y. 14733

PHONE: 1-716-665-1132 FAX: 1-716-665-1135

WORLD WIDE WEB: www.zurn.com



Form # CF94 Date: 10/6/05 C.N. No. 103181 Rev. C