


GROUND HYDRANT Encased, Flush Type, Non-Freeze


Z1365

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

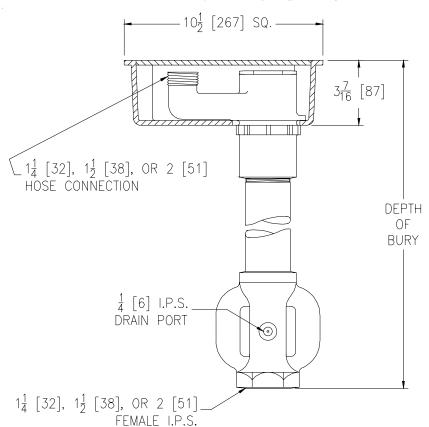

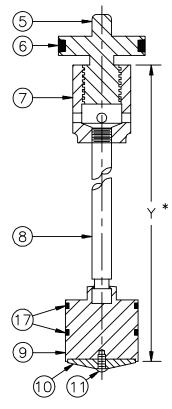

INTERNAL PARTS

Depth of Bury Feet	Approx. Wt. Lbs.[kg]			
2 [610]	42 [19]			
3 [914]	46 [21]			
4 [1219]	50 [23]			
5 [1524]	54 [25]			
6 [1829]	58 [26]			
7 [2134]	62 [28]			
8 [2438]	66 [30]			

ENGINEERING SPECIFICATION: ZURNZ1365

Encased, non-freeze ground hydrant, for flush with grade or finished floor installation. Complete with galvanized steel casing, all bronze interior parts, bronze seat and replaceable seat washer, and non-turning operating rod with free-floating compression closure valve with 1 1/4 [32],1 1/2 [38] or 2 [51] connection. Dura-Coated cast iron box and hinged scoriated cover with operating "T" handle key lock and "WATER" cast on cover. Hydrant is equipped with a tapped 1/4 [6] drain port in valve housing.

Note:

1. <u>IMPORTANT</u> Hydrant must be opened one turn to seal drain port during use.

CONNECTION TYPE:

____ 1-1/4 [32] Hose Connection ____ 1-1/2 [38] Hose Connection

____ 2 [51] Hose Connection

OPTIONS (Check/specify appropriate options)

		<u>ltem</u>	<u>Name</u>	<u>Quan.</u>
SUFFIXES		<u> </u>	Operating Screw	<u>1</u>
BC	Bronze Casing	<u>6</u>	O-Ring	<u>1</u>
DP14	1/4 [6] IP Drain Port in Box	<u>7</u>	Operating Coupling	<u>1</u>
-NB	Polished Nickel Bronze Face	<u>8</u>	Operating Rod	<u>1</u>
-PB	Polished Bronze Face	<u>9</u>	Washer Guide	<u>1</u>
-RB	Plain Bronze Face	<u>10</u>	Washer (neoprene)	<u>1</u>
-RK	Hydrant Parts Repair Kit	<u>11</u>	<u>Screw</u>	<u>1</u>
	riyaranti ans repair tit	<u>17</u>	O-Ring	<u>2</u>

REV. F DATE: 1/29/09 C.N. NO. 99631 DWG. NO. 58879 PRODUCT NO. Z1365

PARTS LIST

*WHEN ORDERING REPLACEMENT PARTS SPECIFY Y DIM.