


SINK FAUCET Z843K4 TAG_____

Engineering Specifications: Zurn AquaSpec® Z843K4

Polished chrome-plated cast brass 8" [203mm] sink faucet with quarter turn ceramic disc cartridges, 3/8" [10mm] short swivel inlets providing adjustable centers from 7-1/4" [184mm] to 8-3/4" [222mm], a 13" [330mm] double-jointed brass swing spout. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 4" [102mm] vandal-resistant color-coded metal wrist blade handles.

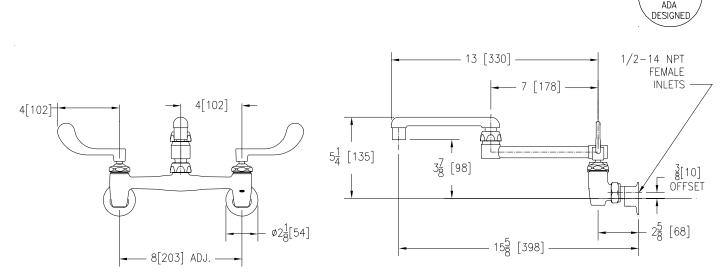

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix	Description
CS	Check Stops
DJ18	18"[457mm] Double Jointed Spout
HCT	Hot/Cold Text Indexes
LSI	2-1/2"[64mm] Long Swivel Inlets with Integral Stops
RC	Rough Chrome Plated
2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Aerator
2F 3F 4F 5F 6P	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow
5F	2.0 GPM [7.6 L] Female Spray Outlet
-6P	Master Carton (Qty. 6)
7F	1.0 GPM [3.8 L] Pressure Compensating Female Spray Outlet
11F	Female Threaded Single Screen Outlet
16F	1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Female Spray Outlet
17F	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Aerator
-18F	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Laminar Flow