


CENTERSET METERING Z86500


TA	G		
	\smile		



Engineering Specifications: Zurn AquaSpec® Z86500

Polished chrome-plated cast brass faucet body with integral shanks, slow-closing metering cartridges, a 4" [102mm] long integral cast spout, and vandal-resistant ADA compliant color-coded metal handles. Easy adjustable cycle time, preset to 10 seconds at 80 PSI. Unit is furnished with a water-conserving spray outlet which reduces flow to .25 GPC [1.0 GPM] (complying to ANSI A112.18.1 Standard for flow), integral shank filters, mounting hardware and 1/2" coupling nuts for standard lavatory risers.



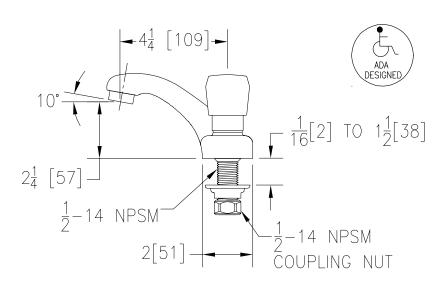

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix	Description
CS	Check Stop
G	1-1/4" [32mm] Grid Strainer Drain
GH	1-1/4" [32mm] Offset Handicap Drain
IN	Institutional Handle - Tamper-Proof and Vandal-Resistant
PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
RKR	ADA Compliant Rocker Handle
3M	0.5 GPM [1.9L] Vandal-Resistant Pressure Compensating Male Spray Outlet
16M	1.0 GPM [3.8 L] Vandal-Resistant Pressure Compensating Male Spray Outlet

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733
Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

Dwg. No. 60517