


Metroflush[™]

TAG

Exposed Z6200 Model Metroflush Piston Operated Flush Valve For Water Closets

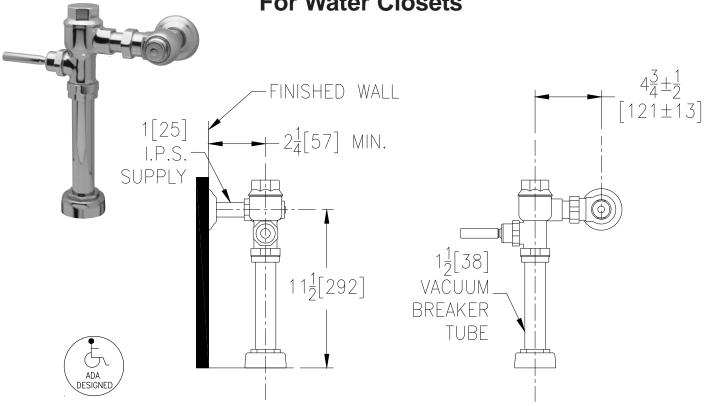

Flow Options

-WS1 1.6 Gal. Low Consumption Flush

Standard Flush 3.5 Gallons Per Flush

Suffix Options (Check/Specify Appropriate Options)

 -DF	Dual Flush
 -L	1"[25] Metal Push Button
 -L3	3"[76] Metal Push Button
 -VC	Vandal Resistant Stop Cover
 -XYV	Less Vacuum Breaker
 -YB	Sweat Solder Kit
 -YC	Cast Wall Flange
 -YH	One Wall Bumper
 -YJ	Split Ring Pipe Support
 -YK	Solid Ring Pipe Support
 -YL	Solid Ring Pipe Support with Bumper
 -YO	Bumper On Angle Stop
	Other

ENGINEERING SPECIFICATION: ZURN Z6200 Metroflush Piston Operated Exposed Closet Flush Valve- The Metroflush is an exposed, quiet type, chrome plated flushometer valve with polished exterior. Complete with Zurn MetroVantage chloramine resistant piston with a clog resistant filtered by-pass. The valve is ADA compliant with a non-hold open and no-leak handle feature, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330 Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292