




Exposed ZER6200PEV-CPM Model Sensor Operated Battery Powered Flush Valve for 1.28 GPF Water Closets

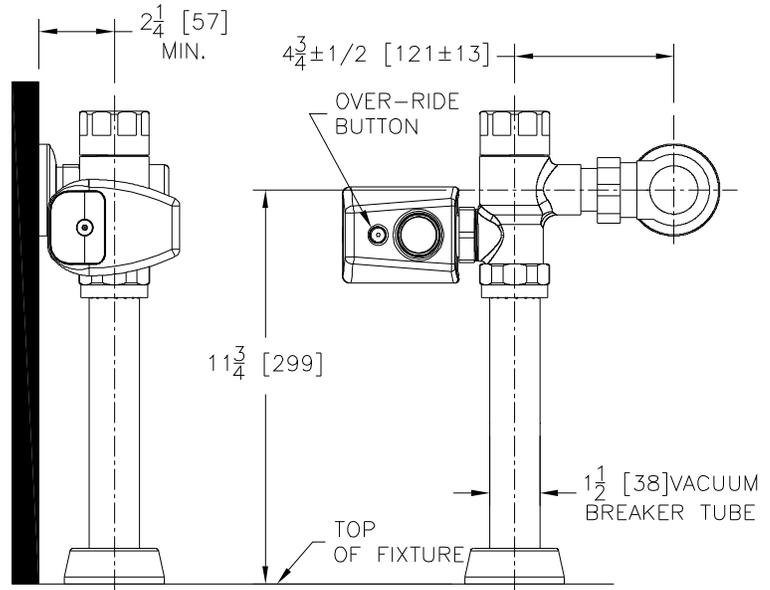

Flow Options

- Standard Flush 1.28 Gal. Low Consumption Flush

Suffix Options (Check/Specify Appropriate Options)

- _____ -YJ Split Ring Pipe Support
- _____ -YK Solid Ring Pipe Support
- _____ -YO Bumper on Angle Stop
- _____ Other

ENGINEERING SPECIFICATION: ZURN ZER6200PEV-CPM Sensor Operated Battery Powered EcoVantage® Piston Operated Exposed Valve for 1.28 GPF Closet - The EcoVantage® valve is an exposed, quiet piston type with self cleaning bypass, chrome plated flushometer valve with a polished exterior. The valve is ADA compliant and incorporates a 6VDC motor actuator, a battery powered automatic sensor, chrome plated metal cover with manual override push button, 10 degree angled sensor, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon guard protection. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292